

The KPD-TS12C-30E is a state-of-the-art HMI device with touchscreen interface and 12.1" TFT color graphic display. Support for 64K colors in the brilliant TFT display will increase the realism of the images. The integrated 10/100 Ethernet interface makes connectivity in complex control systems much more efficient. The SVGA resolution makes it the ideal choice for high-end HMI applications.

## Features

- 12.1" TFT color display
- SVGA (800x600 pixel) resolution
- 64K colors
- Resistive touchscreen
- 10/100 Ethernet interface
- USB port
- Connection to industrial bus systems using optional plug-in modules
- Compatible with video input module
- 64 MB user memory
- Compatible with local I/O



The KPD-TS12C-30E panel is part of Baldor's range of touchscreen panels. All of the touchscreen products share a rich common set of functionalities:

- Powerful and intuitive programming with the Designer 6 software
- Built-in Ethernet port for connection to field devices as well as programming the HMI from Designer.
- USB host port for the connection of flash drives. Flash drives can be used for application upgrade as well as firmware upgrade of the device
- Optional CANopen module
- Dual-driver communication capability
- Vector graphic capabilities including the support of multiple layers and object transparency.
- Video input option
- Display dynamic data in numerical, text, bargraph, analog gauges and graphic image formats
- Data acquisition and trend presentation. Trend data can be transferred to an host computer using the Ethernet connection.
- Recipe data storage. Recipe data can be transferred to an host computer using the Ethernet connection or copied to flash drives via USB connection.
- Multilanguage applications. The number of runtime languages is limited only by the available memory. All text information in the application can be exported in Unicode format for easier translation.
- Powerful macro editor to configure touchscreen operation
- Alarms and historical alarm list. Alarm and event information can be printed or transferred to an host computer.
- Eight level password protection.
- Report printing to serial printer. Reports are freely configurable using Designer.


## Technical Data

Display	
Type	TFT
Resolution	SVGA, 800x600 pixel
Active display area	246x184 mm (12.1"diagonal)
Colors	64K
Backlight	CCFL, 50000 h (note 1)
Brightness	250 Cd/m2 typ.
Dimming	Yes
Memory	
User memory	64 MB internal Flash
Alternate User memory	Optional removable 32/64 MB SSFDC memory card
Front panel	
Touch screen	Analog resistive
Function keys	1
System keys	-
User LED's	1
System LED's	4
Interfaces	
PC/Printer port	Yes, RS-232
PLC port	RS-232, RS-485, RS-422, 20 mA Current Loop
Ethernet port	10/100 Mbit
USB port	Host version 1.1 (1)
Aux port (fieldbus)	Yes, with optional modules
DX port (video input)	Yes
Serial programming speed	9600 – 38400 bps
Local I/O	Yes, with optional modules
Functionality	
Vector graphics	Yes
Dual driver capability	Yes
Video input	Yes
Data acquisition and trends	Yes
Recipe memory	Yes. Flash memory storage limited only by available memory (1)
Alarms	1024
Event list	1024
Password	Yes
Hardware RTC	Yes, battery back-up
Screen saver	Yes
Buzzer	Yes, audible feedback for touch screen
Ratings	
Power supply voltage	24 V DC (18 to 30 Vdc)
Current consumption	1.3A at 24Vdc(max.)
Fuse	Automatic
Weight	Approx 2.8 Kg
Battery	3 V 285 mA Lithium, non rechargeable, user replaceable, RENATA model CR2430. Replace with same component or equivalent.
Environmental Conditions	
Operating temperature	0 to 45 °C
Storage temperature	-20 to +70 °C
Operating and storage humidity	5 – 85 % RH non-condensing
Protection class	IP65 (front panel), IP20 (rear)
Approvals	
CE	Emission: EN 61000-6-4 Immunity: EN 61000-6-2. For installation in industrial environments

**Note 1:** the lamp lifetime is the typical value for continuous operation at 25°C.


**Note 2:** operation of the built-in USB interface and recipe storage to flash memory require an appropriate firmware version and use of Designer 6.07 or higher.

## Dimensions and Cutout

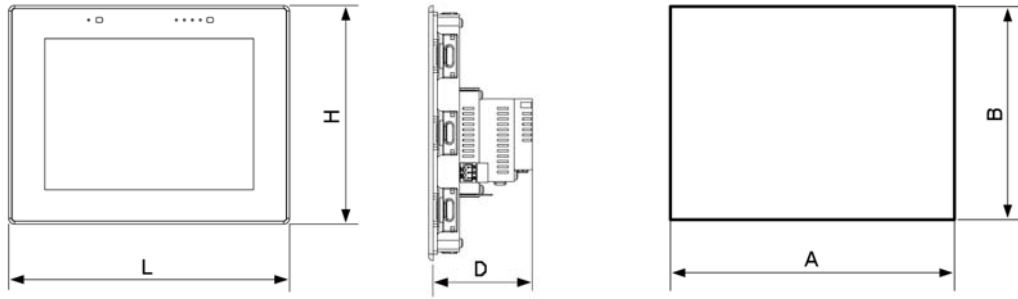

Faceplate LxH	337x267 mm (13.26x10.51")
Cutout AxB	326x256 mm (12.83x10.08")
Mounting depth D	91 mm (3.58")

## Connections

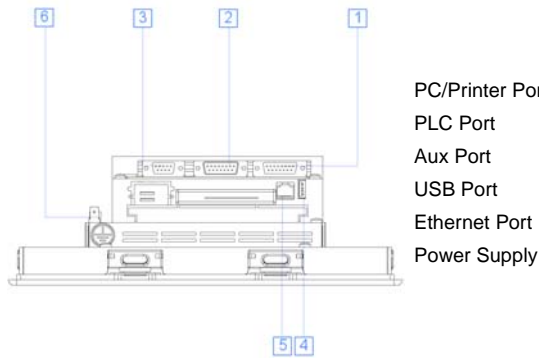

## Contact

For further office locations visit [www.baldor.com](http://www.baldor.com)

<b>World Headquarters (U.S.A.)</b> <b>Baldor Electric Company</b> Tel: +1 479 646-4711 Fax: +1 479 648-5792 E-mail: <a href="mailto:sales.us@baldor.com">sales.us@baldor.com</a>	<b>Australia</b> Tel: +61 2 9674 5455 Fax: +61 2 9674 2495 E-mail: <a href="mailto:sales.au@baldor.com">sales.au@baldor.com</a>	<b>China</b> Phone: +86-21-5760 5335 Fax: +86-21-5760 5336 E-mail: <a href="mailto:sales.cn@baldor.com">sales.cn@baldor.com</a>	<b>Germany</b> Tel: +49 89 905 08-0 Fax: +49 89 905 08-490 E-mail: <a href="mailto:sales.de@baldor.com">sales.de@baldor.com</a>
<b>India</b> Tel: +91 20 25 45 27 17/18 Fax: +91 20 25 45 27 19 E-mail: <a href="mailto:sales.in@baldor.com">sales.in@baldor.com</a>	<b>Italy</b> Tel: +41 91 640 9950 Fax: +41 91 630 2633 E-mail: <a href="mailto:sales.it@baldor.com">sales.it@baldor.com</a>	<b>Japan</b> Tel: +81 45-412-4506 Fax: +81 45-412-4507 E-mail: <a href="mailto:sales.jp@baldor.com">sales.jp@baldor.com</a>	<b>Korea</b> Tel: +(82) 2 2226 9369 Fax: (82) 2 2226 9368 E-mail: <a href="mailto:DKim@baldor.com">DKim@baldor.com</a>
<b>Mexico</b> Tel: +52 477 761 2030 Fax: +52 477 761 2010 E-mail: <a href="mailto:sales.mx@baldor.com">sales.mx@baldor.com</a>	<b>Switzerland</b> Tel: +41 52 647 4700 Fax: +41 52 659 2394 E-mail: <a href="mailto:sales.ch@baldor.com">sales.ch@baldor.com</a>	<b>Singapore</b> Tel: +65 6744 2572 Fax: +65 6747 1708 E-mail: <a href="mailto:sales.sg@baldor.com">sales.sg@baldor.com</a>	<b>Taiwan</b> Tel: + (886) 4 238 04235 Fax: + (886) 4 238 04463 E-mail: <a href="mailto:AChen@baldor.com">AChen@baldor.com</a>
<b>United Kingdom</b> Tel: +44 1454 850000 Fax: +44 1454 859001 E-mail: <a href="mailto:sales.uk@baldor.com">sales.uk@baldor.com</a>			